
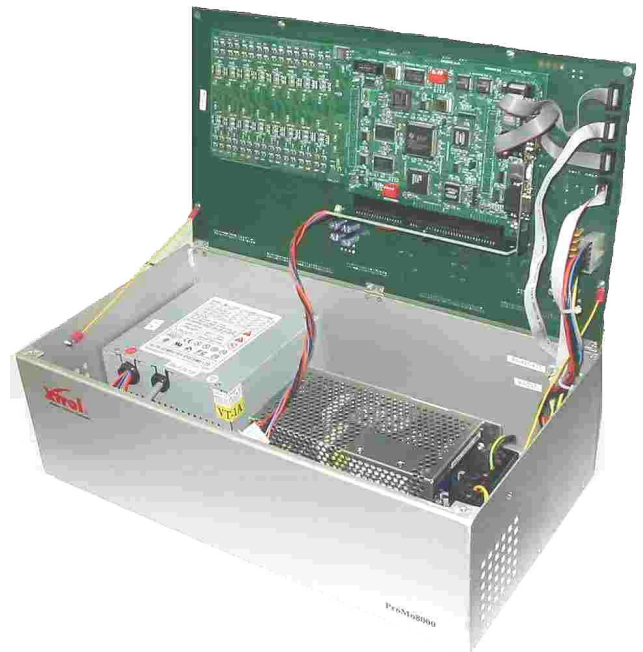


## ProMo8080 Control System.

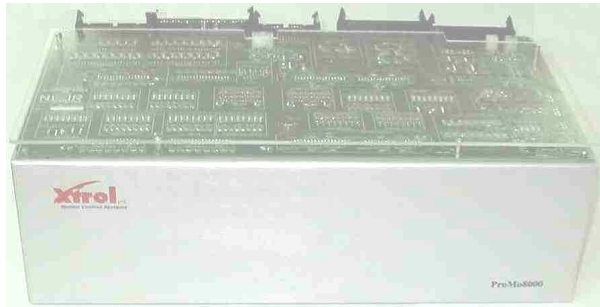

### System has the following spec:

- Stand Alone in separate enclosure and power supply;
- 128 digital Inputs and Outputs, includes 24 VDC power supply for external connections;
- 8 axis servo control;
- 12 feedback encoders (direct and dual);
- 8 Analog Inputs 12-bit resolution, +/- 10 VDC;
- Programmable real position pulse train signal;
- Programmable real position strobe signal;
- High speed position capture (Latch) Input;
- RS 232 communication interface channel.
- RS 485 communication interface channel.

Flash memory, 4 Mbyte.

DSP of TI, 60 MHz, 32-bit Floating Point, 1 Mbyte RAM.